


Submittal

TAG:

Heat Pump Unit

X16 Split System Heat Pump

Cooling capacity: 24 - 60 kBTU/h

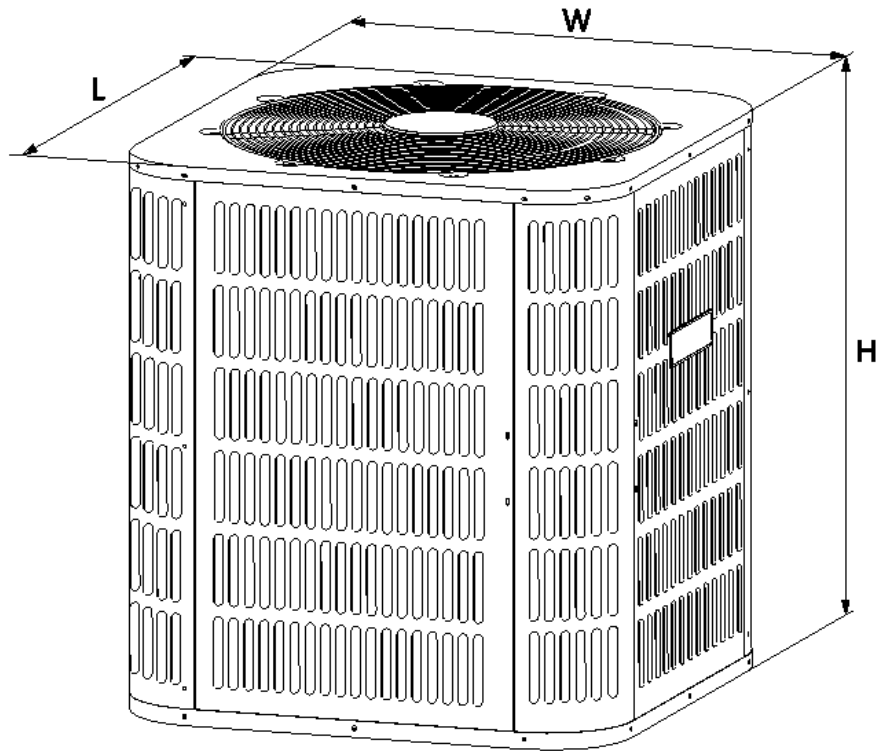

Model Size	Unit Width "W" in. [mm]	Unit Height "H" in. [mm]	Unit Length "L" in. [mm]
24	28 [710]	24-15/16 [633]	28 [710]
36	28 [710]	24-15/16 [633]	28 [710]
60	29-1/8 [740]	33-3/16 [843]	29-1/8 [740]

Specifications

	MOVB-24HDN10-M16G	MOVB-36HDN10-M16G	MOVB-60HDN10-M16G
NOMINAL CAPACITY			
Cooling (BTU/h)	24,000	34,200	54,000
Heating (BTU/h)	24,000	34,600	56,000
ELECTRICAL DATA			
Voltage / Phase (60 Hz)	208/230V-1Ph	208/230V-1Ph	208/230V-1Ph
Min. / Max. Voltage (V)	187/253	187/253	187/253
Min. Circuit Amps (MCA) (A)	21.8	25.8	38.7
Max. Overcurrent Protection (MOP) (A)	30	30	45
COMPRESSOR			
Type	Rotary	Rotary	Rotary
Stage	Variable-speed	Variable-speed	Variable-speed
Rated Load Amps (RLA) (A)	16	19	29
Crankcase Heater	20W	20W	25W
CONDENSER COIL			
Type	Tube & Fin	Tube & Fin	Tube & Fin
Tube Size (O.D.) (in.)	9/32	9/32	9/32
FAN MOTOR			
Motor Type	ECM	ECM	ECM
Capacitor(uF)	/	/	/
Horsepower (HP)	1/3	1/3	1/3
Full Load Amps (FLA) (A)	1.8	2.0	2.4
REFRIGERATION SYSTEM			
Liquid Valve Size (O.D.) (in.)	3/8	3/8	3/8
Suction Valve Size (O.D.) (in.)	3/4	3/4	7/8
Liquid Line Size ("O.D.) (in.)	3/8	3/8	3/8
Suction Line Size ("O.D.) (in.)	3/4	3/4	7/8
Refrigerant Charge (lbs. - oz.)	4 lbs. 13 OZ.	5 lbs. 11 OZ.	8 lbs. 2 OZ.
OPERATION RANGE			
Cooling(°F)	40-120	40-120	40-120
Heating(°F)	3~86	3~86	3~86

Table 1

¹ Tested and rated in accordance with AHRI Standard 210/240.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes.

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Standard Features:

- R454B chlorine-free refrigerant.
- Energy-efficient compressor.
- Internal protection against high-temperature motor overload.
- High quality condenser with inner-groove copper tube and aluminum fin.
- Built-in communication between inverter DC indoor and outdoor units
- AHRI certified and ETL listed.
- Wide operating range, 40°F~120°F cooling, 3°F~86°F heating
- Quickly equalize system pressure

Cabinet Features:

- Compact design, easy installation and transportation.
 - Powder galvanized steel cabinet.
 - Wire-fan discharge grille.
 - Steel-louver coil guard
-

Midea Building Technologies Division

Add.: Midea Headquarters Building, 6 Midea Avenue, Shunde, Foshan, Guangdong, China

Postal code: 528311

mbt.midea.com/global www.midea-group.com ics.midea.com

Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.

